

571,320

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number  
**WO 03/090250 A1**

- (51) International Patent Classification<sup>7</sup>: **H01J 61/40**, 61/82, 61/34
- (21) International Application Number: PCT/IB03/01449
- (22) International Filing Date: 14 April 2003 (14.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
102 17 480.6 19 April 2002 (19.04.2002) DE
- (71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH** [DE/DE]; Stein-damm 94, 20099 Hamburg (DE).
- (71) Applicant (for all designated States except DE, US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and -
- (75) Inventor/Applicant (for US only): **TIESLER-WITTIG, Helmut** [DE/DE]; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (74) Agent: **VOLMER, Georg**; Philips Intellectual Property & Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: GAS-DISCHARGE LAMP WITH A COLOUR-COMPENSATING FILTER

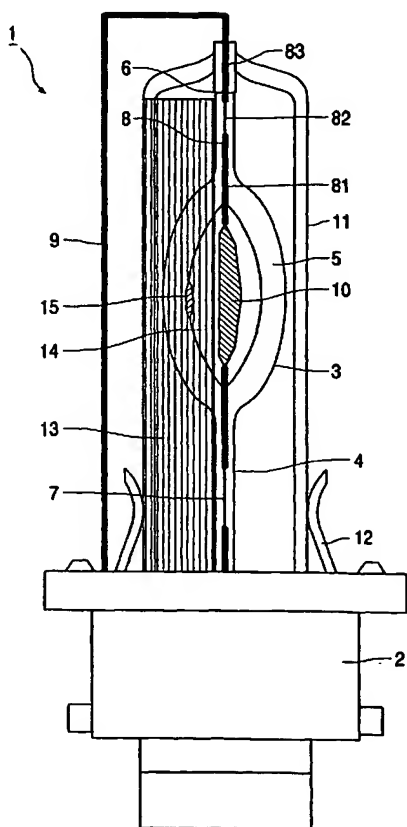

(57) Abstract: The invention relates to a gas-discharge lamp having a discharge vessel (5), two electrodes (7, 8), a cap (2), an outer envelope (11), and a filling in the discharge vessel comprising a metal halide. Gas-discharge lamps of this kind are used in particular as light sources for the headlight systems of motor vehicles. In order to easily improve the quality of the color of the beam from the lamp, particularly for application in an optical imaging system such as a reflector of a motor vehicle headlight, the outer envelope of the gas-discharge lamp is partially coated with an optical compensating filter (13) of a color complementary to the color of the metal halide. In gas-discharge lamps of the generic kind, that proportion (15) of salts in the filling that is not in the gaseous state when the lamp is operating produces a coloration in the beam generated. The yellowish condensate (15) in the discharge vessel causes an area of yellowish coloration in the beam. By partially coating the outer envelope with a compensating filter, the unwanted coloration in the beam can be corrected if the filter is of the appropriate complementary color.

WO 03/090250 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

# PCT

REC'D 07 AUG 2003

WIPO PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PHDE020095W0</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/IB 03/ 01449</b>	International filing date (day/month/year) <b>14/04/2003</b>	(Earliest) Priority Date (day/month/year) <b>19/04/2002</b>
Applicant <b>PHILIPS INTELLECTUAL PROPERTY &amp; STANDARDS GMBH</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 5 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

### 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established by this Authority to read as follows:

**GAS-DISCHARGE LAMP WITH A COLOUR-COMPENSATING FILTER**

5. With regard to the **abstract**,

☐ the text is approved as submitted by the applicant.

☒ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1  
☐ None of the figures.

## GAS-DISCHARGE LAMP WITH A COLOUR-COMPENSATING FILTER

The invention relates to a gas-discharge lamp having a discharge vessel, two electrodes, a cap, an outer envelope, and a filling in the discharge vessel comprising a metal halide.

Gas-discharge lamps of this kind are used in particular as light sources for the  
5 headlight systems of motor vehicles, because the optical properties of gas-discharge lamps provide a range of advantages (such as more light, for example). The filling in the discharge vessel permanently regenerates the discharge plasma, and lamps of this kind require a proportion of metal halide (salt proportion) in their filling in order to control the color of the light and the efficacy of the lamp. While the lamp is operating, this salt proportion in the  
10 filling forms a yellowish condensate, which is generally situated at the bottom of the vessel. When the image of the lamp is reproduced by the optical system of the headlight, this yellowish area is also shown in the headlight beam. The yellowish area is then typically situated in the front part of the beam on the road.

A capped high-pressure gas-discharge lamp of the generic kind is known, for  
15 example, from US patent 5,646,471. This lamp has a discharge vessel that is surrounded by an outer envelope. An appropriately designed cap makes it particularly suitable for use as a motor vehicle lamp. Contacts arranged in the cap are connected via supply conductors to corresponding electrodes that project into the discharge vessel. A neck-shaped end of the discharge vessel is fixed in place in the cap, while a second, opposing end, which is also  
20 neck-shaped, is arranged to be free. Arranged to be tightly sealed in each of the ends are respective electrodes, of which an inner portion projects into the discharge vessel and is connected to an outer portion via a molybdenum foil in the seal. The electrode at the free end is connected to the corresponding contact in the cap via a supply conductor that extends along the outside of the outer envelope. This supply conductor is provided with a small  
25 insulating ceramic pipe. The purpose of the outer envelope in this case is to reduce the temperature differences in the discharge vessel, as a result of which it is possible to obtain a higher luminous flux while power consumption remains the same. Because of the outer envelope, it is also possible to obtain a reduction in the maximum temperature of the discharge vessel without reducing the luminous flux in comparison with a lamp not having an

outer envelope. The outer envelope may be surrounded by a light-absorbing coating that covers at least a certain zone. The longitudinal extension of this zone is defined by a certain angular range. The coating is arranged at the first end of the lamp that is fixed in place in the cap and that is situated opposite the free end. A light source designed in this way is ideally  
5 suited for use in so-called projection headlights, where the light emitted is collected in an elliptical mirror in such a way that an image of it, together with a mask for stray light, is formed on the road by a projecting lens. To allow the light source to be used in headlights having so-called reflection systems, there is also applied to the side of the outer envelope, along the discharge arc, a band-shaped coating that, in optical systems of this kind, performs  
10 the function of the mask for stray light. The width of the bands is set by certain angles between the corresponding edges of the bands on the outer envelope. The intention of the coating and of the way in which it is sized is that, when the lamp is operating in a motor vehicle headlight, any glare caused by stray light emitted by the lamp is avoided. Consequently, what is provided is an absorption filter that totally blocks radiation in the areas  
15 in question. Hence, with this lamp, the salt filling also produces a yellowish condensate of which, in operation, an image is formed by the optical system as a yellowish area in the beam of light.

German application laid open to public inspection DE100 12 827 A1 describes an arc-discharge lamp that is operated in, for example, main headlights of automobiles. The  
20 lamp comprises an arc-discharge tube of light-transmitting material such as quartz and a first and a second end having a first hollow therebetween. An electrode is sealed into each of the first and second ends. Each electrode comprises an external portion, an intermediate portion of molybdenum foil, and an internal portion, the portions being formed from tungsten or tungsten alloy. After the description, the application looks at the problem of the point where  
25 the halogen metal salts that are contained in the filling of the arc-discharge lamp are deposited. Particularly when lamps of low power (up to 100W) are used for main headlight applications, annoying bands of color occur that are caused by changes in the additives. This problem becomes more significant when the lamp is combined with a reflector. According to the application, there is provided in the lamps a second hollow that is formed in one of the  
30 ends of the arc-discharge tube, the second hollow being offset from the first but connected thereto. The second hollow provides a unique cold spot and acts as a vessel for those additives that are not vaporized. When the lamp is operating, the second hollow acts as a reservoir and contains excess halogen metal in an unvaporized state. This reservoir removes

materials that are not needed and the latter are therefore unable to adversely affect the optics of the lamp or to produce bands of color.

In this lamp a second hollow has to be produced at some cost and effort, for which reason the manufacturing process for the discharge vessel has to be appreciably revised and extended. This makes production more complicated and more prone to producing lamps having faulty discharge vessels.

It is therefore an object of the invention to provide a gas-discharge lamp that is easily able to give better color rendering, particularly for applications in optical imaging systems such as reflectors.

This object is achieved in that the outer envelope of the gas-discharge lamp is partly coated with an optical compensating filter of the color complementary to the color of the metal halide. In gas-discharge lamps of the generic type, a coloration is produced by that proportion of salts in the gas filling that is not in a gaseous state when the lamp is operating. The yellowish condensate in the discharge vessel is struck by the light from the discharge arc and produces an area having a yellowish coloration. By partly coating the outer envelope with a compensating filter, the unwanted coloration in the beam of light generated can be corrected if the filter is of the appropriate complementary color. By applying the filter to the outer envelope, the colored area is corrected before an image of the arc is formed by an optical system. The coating with a compensating filter is only partial, and because of this and in contrast to a complete coating, as little as possible of the radiation generated is filtered and absorbed. The brightness and luminous efficacy of the lamp are reduced to an appreciably smaller degree. The compensating filter can easily be adjusted to suit the color of the salt proportion if, for functional reasons for example, the composition of the proportion is varied. The extent of the coating may be adjusted likewise, as a function of the extent and amount of the salt condensate.

Specified in the other claims are preferred embodiments of the lamp according to the invention that come within the scope of the teaching claimed, and a lighting unit having a lamp according to the invention, in particular for use as a vehicle headlight.

It is particularly advantageous in this case if the compensating filter is applied in that region of the outer envelope which, when the lamp is fitted and operating, is the bottom region of the outer envelope. The proportion of salts in the filling that is non-gaseous in operation generally deposits in the bottom region of the discharge vessel. Hence, the compensating filter is also applied in that bottom region of the outer envelope which is adjacent the position of the yellowish condensate. In operation, the lamp is generally fitted in

a horizontal position. The compensating filter is then applied to the bottom half-cylinder of the outer envelope.

For advantageous further embodiments of the lamp according to the invention, the compensating filter comprises an interference filter. The particular advantage of the use of an interference filter as the compensating filter is that the filter color can be very accurately set by selecting the layers of the interference filter. This can easily be done because the technique concerned is one that has been fully mastered and it is easily possible for the outer envelope, which is generally made of quartz, to be coated.

In another embodiment of the lamp according to the invention, the compensating filter comprises an absorption filter. By using an absorption filter, it is even possible for the perceived color to be shifted towards the filter color blue. Technical implementation can be achieved by using a dip process, for example, in which the burner mounted in the outer envelope is dipped.

As well as this, an additional optical filter for color-shifting purposes may be provided, by which the overall perceived color from the lamp is changed. Color-shifting filters specifically matched to the compensating filter can shift the perceived color towards a blue or a yellow coloration, for example. Colorations of this kind are used particularly in motor vehicle lamps to improve the quality of the light or for special viewing conditions.

In an advantageous embodiment of the lamp, provision is made for the compensating filter to be applied in that region of the outer envelope that, in a lamp which is fitted and operating, is adjacent that region of the discharge vessel in which the non-gaseous proportion of the metal halide is situated. By lining the partial compensating filter up with the non-gaseous proportion and the arc, an exact correction is obtained without the color reproduction of the beam produced by the lamp being changed to any unnecessary degree. In this case, the partial compensating filter must cover at least the range that ensures correction of the yellowish coloration in the beam. Hence, its minimum size depends on the position and size of the condensate and the arc. When the lamp is used in an optical imaging system such as a reflector, the partial compensating filter can be optimized such that the colored region is corrected in the beam that is produced by forming an image of the arc. The compensating filter would be adjusted to the particular optical system in this case.

The coating forming the compensating filter is advantageously and simply applied by a dip process that, being a known technique, can easily be handled and can be used for the outer envelope of the lamp.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiment described hereinafter. In the drawings:

Fig. 1 is a side elevation of a capped gas-discharge lamp for use in motor vehicle headlights.

5           The gas-discharge lamp 1 shown in side elevation in Fig. 1 is a high-pressure gas-discharge lamp for motor vehicle headlights that is usually referred to as a so-called MPXL lamp (micro-power xenon lamp). The lamp 1 has a cap 2 that is used to fit the lamp 1 into a motor vehicle headlight. For this purpose, the cap 2 is provided with receptacles and alignment marks (not shown) that enable the lamp 1 to be seated in a way in which it can be  
10 taken hold of, and to occupy an aligned position in the headlight. For reasons of clarity, the contacts arranged on the cap 2 for the external supply of power have not been shown either.

Fitted in the cap 2 is a burner 3 of quartz that comprises a first neck-shaped end 4, a discharge vessel 5, and a second neck-shaped end 6. The burner 3 is fixed in the cap 2 at its second neck-shaped end. Sealed into the neck-shaped ends 4, 6 that seal off the  
15 discharge vessel hermetically are respective electrodes 7, 8. The electrodes 7, 8 comprise an inner portion 81 composed of a tungsten wire that projects into the discharge vessel 5, a central portion 82 of molybdenum foil in the region of the hermetic seal, and an outer portion 83 composed of a tungsten wire for making contact. The outer portion 83 of the electrode 8 at the end remote from the cap 2 is connected to a contact in the cap 2 by a return wire 9. It is  
20 possible for the return wire 9 to be insulated with a ceramic pipe, but this is not shown in Fig. 1. A discharge arc 10 is produced in the discharge vessel 5 between the two inner portions of the electrodes 7, 8 when the lamp 1 is operating.

By means of a sleeve 12 that is solidly connected to the cap 2, an outer envelope 11 is mounted on the cap 2. For greater clarity, the known way in which the outer  
25 envelope 11 is mounted in the sleeve 12 has not been precisely shown. The outer envelope 11 is composed of quartz and is filled with air. The bottom region of the outer envelope 11 is coated with a blue compensating filter 13. The filter 13 extends over the cylindrical outer envelope 11 in the longitudinal direction from the cap 2 to the end of the outer envelope 11. On the circumference of the cylindrical surface of the outer envelope 11, the compensating  
30 filter 13 extends approximately over an angular range of 170°, which is approximately equally divided between the two sides.

When the lamp 1 is operating, a discharge plasma forms in the discharge chamber 14 formed by the discharge vessel 5, if the filling in the discharge vessel 5 is in a gaseous state due to excitation via the electrodes 7, 8. Since not all of the quantity of salts in



the filling is in the gaseous state, a yellowish condensate 15 is produced and this deposits at the bottom of the discharge chamber 14. The light generated by the discharge arc 10 is discolored by the condensate 15, as a result of which there would be an area of a yellowish coloration in the beam. The coloration caused by the condensate 15 is corrected by the compensating filter 13 before an image of the discharge arc 10 is formed by a reflector or a projection system belonging to the headlight in which the lamp 1 is fitted. Hence, by using the lamp 1 according to the invention, what is produced by the headlight is a beam that, on the road, no longer has an area of yellowish coloration.

In the embodiment shown, the compensating filter 13 is applied in that bottom region of the cylindrical outer envelope 11 that covers an angular range of approximately 170° on the surface of the cylinder. Readily conceivable within the scope of the inventive concept are other embodiments in which the compensating filter 13 covers a greater or smaller angular range or is shorter in length. Particular requirements to be met by the headlight can be catered for in this way. However, the compensating filter must be at least sufficiently large for the yellowish coloration to be fully corrected in the imaged beam. Consequently, the shape of the compensating filter 13 may be adjusted to suit given imaging systems in headlights and to suit requirements that headlight manufacturers have.

## CLAIMS:

1. A gas-discharge lamp having a discharge vessel, two electrodes, a cap, an outer envelope, and a filling in the discharge vessel comprising a metal halide, characterized in that the outer envelope is partially coated with an optical compensating filter of a color complementary to the color of the metal halide.
- 5 2. A gas-discharge lamp as claimed in claim 1, characterized in that the compensating filter is applied in that region of the outer envelope that is the bottom region of the outer envelope when the lamp is fitted and operating.
- 10 3. A gas-discharge lamp as claimed in claim 1, characterized in that the compensating filter comprises an interference filter.
4. A gas-discharge lamp as claimed in claim 1, characterized in that the compensating filter comprises an absorption filter.
- 15 5. A gas-discharge lamp as claimed in claim 1, characterized in that an additional optical filter is provided for color shifting purposes.
6. A gas-discharge lamp as claimed in claim 1, characterized in that the compensating filter is applied in that region of the outer envelope that, in a lamp which is fitted and operating, is adjacent that region of the discharge vessel in which the non-gaseous proportion of the metal halide is situated.
- 20 7. A gas-discharge lamp as claimed in claim 1, characterized in that the coating forming the compensating filter is applied by a dip process.
- 25 8. A lighting unit, particularly for vehicle headlights, having a gas-discharge lamp as claimed in claim 1.

1/1

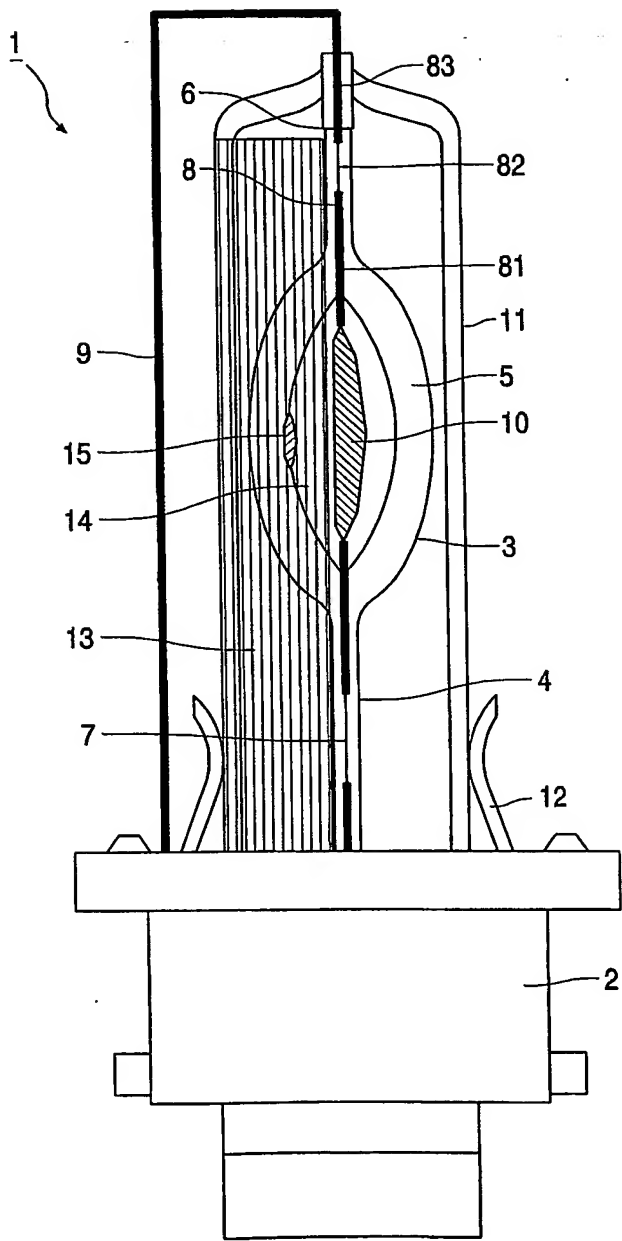


FIG. 1

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/01449

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01J61/40 H01J61/82 H01J61/34

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 935 277 A (MATSUSHITA ELECTRONICS CORP) 11 August 1999 (1999-08-11) column 5, line 25 -column 7, line 39; figures 1-3 column 6, line 50-54	1,2,4,6, 8
A	US 5 402 037 A (IRISAWA SHINICHI ET AL) 28 March 1995 (1995-03-28) column 4, line 12-26; figure 2	
A	WO 01 84596 A (PHILIPS CORP INTELLECTUAL PTY ;KONINKL PHILIPS ELECTRONICS NV (NL)) 8 November 2001 (2001-11-08) abstract page 4, line 26 -page 6, line 10; figures -/--	3,4,7

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

1 August 2003

Date of mailing of the international search report

07/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Lang, T

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/IB 03/01449

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 284 704 A (GEN ELECTRIC) 14 June 1995 (1995-06-14) page 24, line 27 -page 27, line 32; figures 29-35	3
A	US 5 610 469 A (BERGMAN ROLF S ET AL) 11 March 1997 (1997-03-11) abstract column 3, line 14 -column 5, line 27; claim 6	3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/01449

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0935277 A	11-08-1999	JP 2891690 B2	17-05-1999
		JP 11224650 A	17-08-1999
		CN 1225496 A	11-08-1999
		EP 0935277 A1	11-08-1999
		US 6384535 B1	07-05-2002
		US 2001000121 A1	05-04-2001
US 5402037 A	28-03-1995	JP 2878520 B2	05-04-1999
		JP 5266862 A	15-10-1993
		DE 4308217 A1	23-09-1993
		FR 2688936 A1	24-09-1993
		GB 2265251 A , B	22-09-1993
WO 0184596 A	08-11-2001	DE 10040887 A1	30-08-2001
		CN 1388984 T	01-01-2003
		DE 20022997 U1	24-10-2002
		WO 0184596 A1	08-11-2001
		EP 1228525 A1	07-08-2002
		US 2002021065 A1	21-02-2002
GB 2284704 A	14-06-1995	CA 2137585 A1	11-06-1995
		DE 4443354 A1	14-06-1995
		FR 2713825 A1	16-06-1995
		GB 2313706 A , B	03-12-1997
		JP 7262973 A	13-10-1995
		US 5587626 A	24-12-1996
		US 5676579 A	14-10-1997
US 5610469 A	11-03-1997	DE 19609328 A1	19-09-1996